


HAND AUGER SET 16-T0005

STANDARD: ASTM D420, D1452 / AASHTO T86, T202 / CNR A. VI N. 25

Hand auger set are suitable for hand-boring in cohesive soils or sands and gravels, above the water table to a depth of 5 or 6m. Soil Auger Heads are constructed of heavy-duty steel plates forming an open tube partly interlocking at the cutting end. Two diameters are available 100 mm or 150 mm. The Gravel Auger Head comprises a one-piece steel casting with a spiral point and two clap plates designed to close when lifting samples from the borehole. Its diameter is 150 mm.

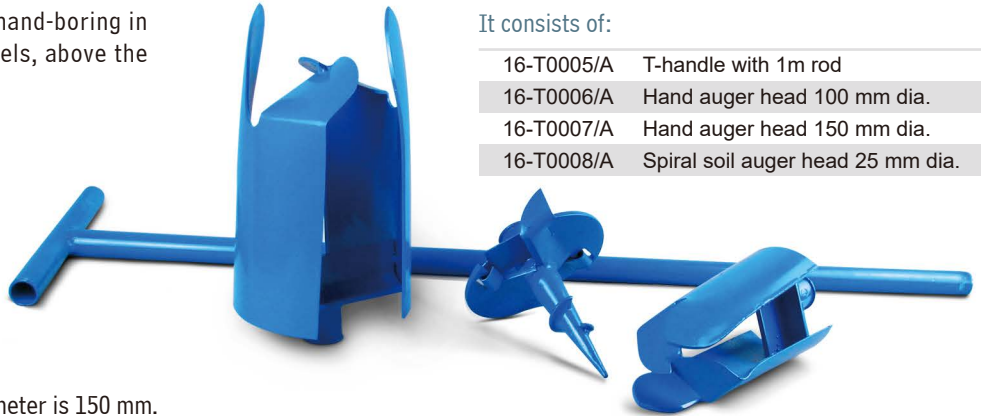

It consists of:

16-T0005/A	T-handle with 1m rod
16-T0006/A	Hand auger head 100 mm dia.
16-T0007/A	Hand auger head 150 mm dia.
16-T0008/A	Spiral soil auger head 25 mm dia.



DUTCH BUCKET AUGER 16-T0009

16-T0009/A	Dutch bucket auger head 75 mm dia.
16-T0009/A1	Dutch bucket auger head 100 mm dia.
16-T0009/A2	T-Handle
16-T0009/A3	1 m extension rod
16-T0009/A4	1.2 m extension rod

SOIL AUGER YZ-1

The soil auger YZ-1 is used to take undisturbed soil samples.

It consists of:

- ◆ Bulldozer
- ◆ Drill pipe: metal structure with scale
- ◆ Drill cylinder: 100ml
- ◆ Specimen cup: 100ml



SPIRAL SOIL AUGER LX-1

Auger head	Φ50mm x 200mm
Drill rod (with scale) length	5m
Weight	16Kg

